



Features

- Single, dual and multi-coloured models available
- Ultra bright latest generation LED's
- 11 – 30 volt operation
- Low current draw (2.2 amps max on 12v system)
- 6 flash patterns
- UV stabilised lenses
- Single bolt, magnetic & suction mount options
- ECE R65 approved & DEKRA speed rated


Technical

Dimensions	255mm x 179mm x 55mm (including magnets)
Voltage	11 – 30v
Light Output	400 lumens (Amber) // 270 lumens (Blue)
Weight	1.7kg (including magnets)
Speed Test	Dekra 153mph
Guarantee	5 years

Flash Pattern	Current Draw (12v)
Mega-Flash	2.2 Amps
Quad Flash	1.5 Amps
Triple Flash	1.7 Amps
Double Flash	1.5 Amps
Single Flash	2.2 Amps
Hyper Flash	2.0 Amps



Dimensions

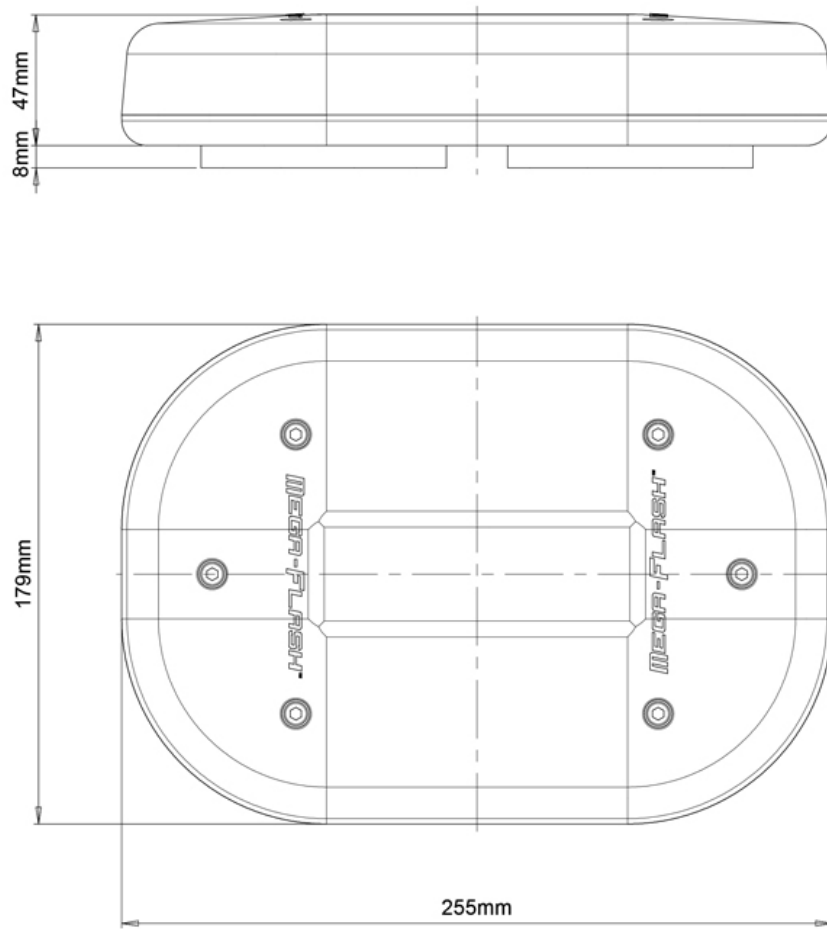


Cable Functions (standard single colour bolt mount microbar)

Function	Cable Colour	Description
Standby Power +Ve	Red	Microbar is in Standby mode
Ground -Ve	Black	0v ground / earth
Power 360 colour 1	Green	Flashes the LEDs
Pattern +Ve	Dark Brown	Pattern select
Dim +Ve	Blue	Light output reduces to 25% brightness
Synchronisation	Yellow	Link to other mega-flash products
Spare	Grey	Spare
Spare	Orange	Spare
Spare	Purple	Spare
Spare	White	Spare




Installation (single bolt)

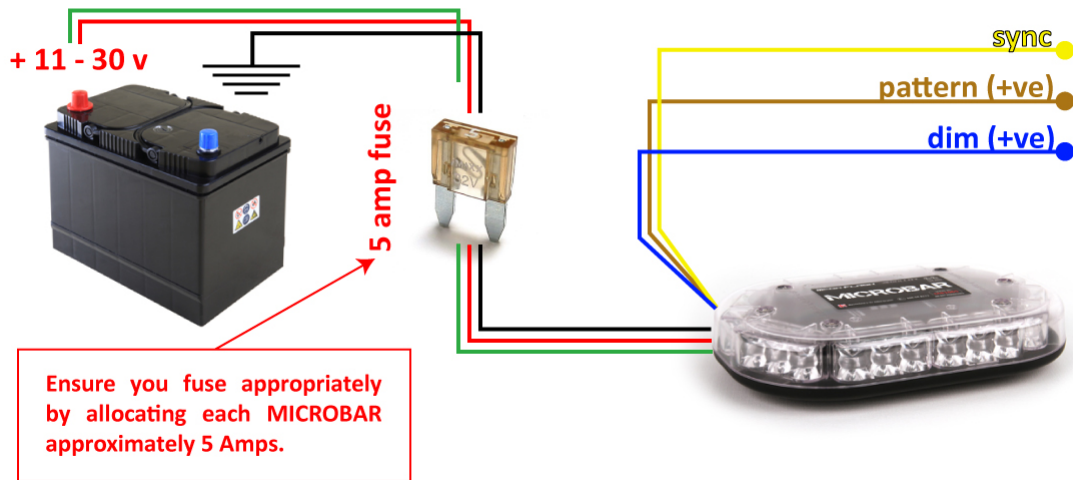

Magnetic & Suction cup mounts

Depending upon specification, the microbar will be supplied with either of the following cigarette plugs. The latching-momentary cig plug is standard but when deviating from standard build we may need to provide a latching-latching or latching-latching-momentary cig plug.

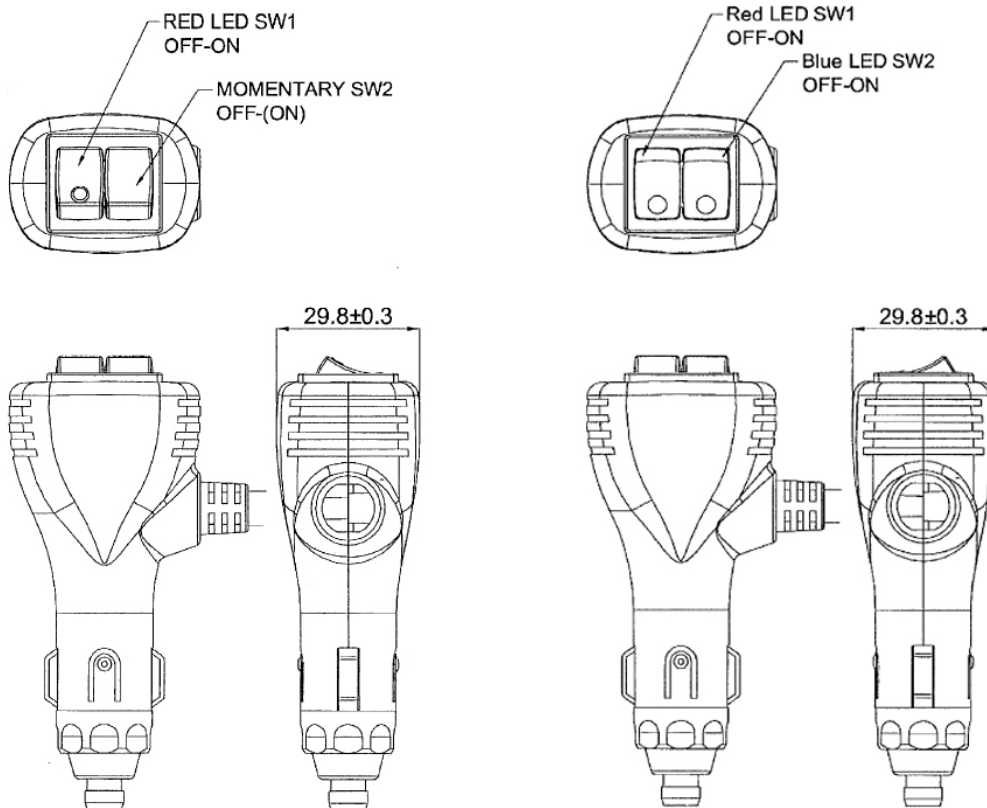

Associated datasheets

- Suction cup maintenance
- ECE R65 approval
- DEKRA speed approval